



# How to set up VigorPhone 350 with VigorIPPBX2820 series by using Auto-Provisioning?

DrayTek VigorIPPBX2820/VigorIPPBX2820n supports the function of auto-provisioning. VigorPhone 350 is also capable of auto-provisioning, it can get a configuration text file from the VigorIPPBX2820 series. The configuration file contains SIP settings that the SIP devices can register with VigorIPPBX2820 series.

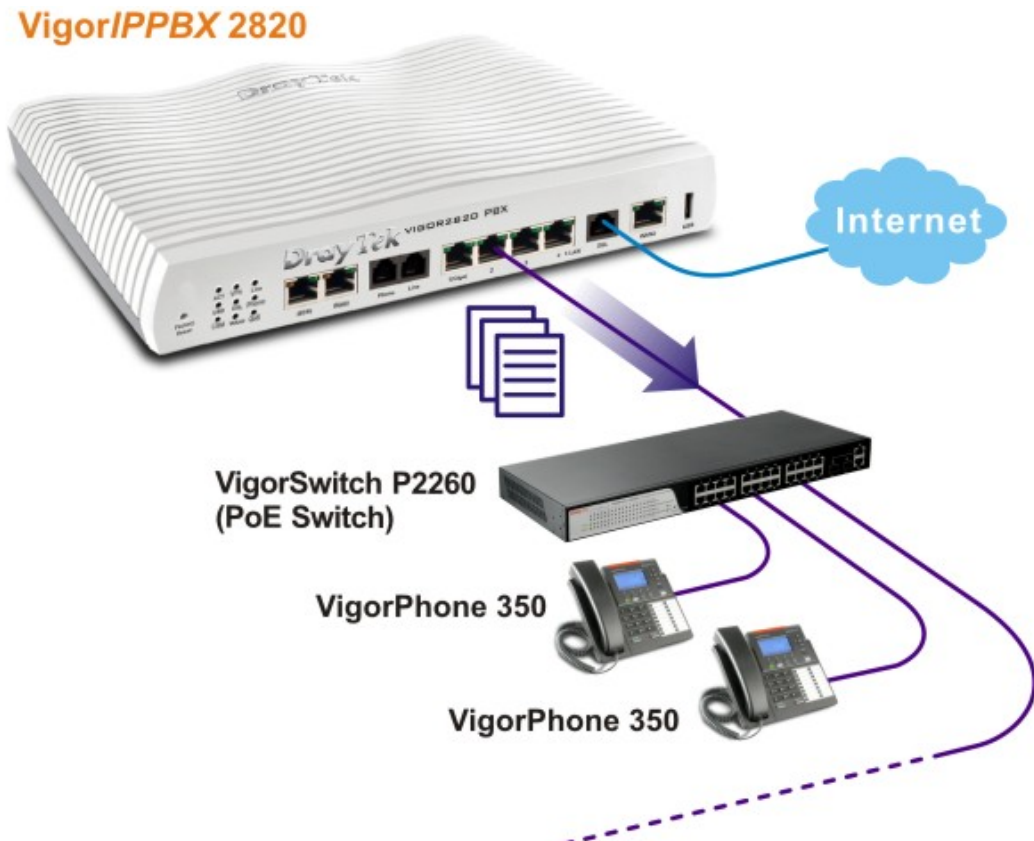

1. Configure the extension number and password for each IP phone on VigorIPPBX. You can configure extensions from IP PBX Wizard.

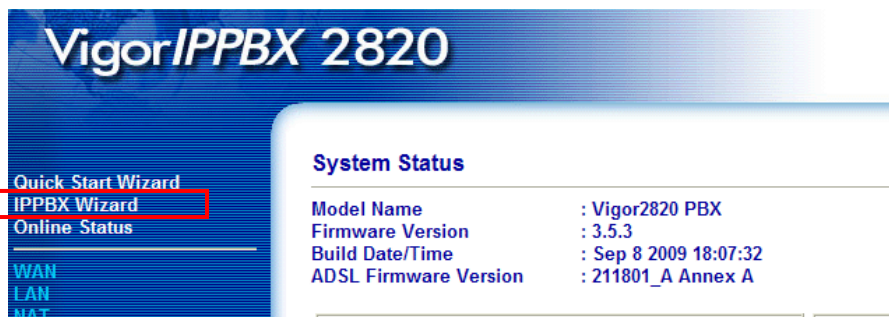

- Click **IPPBX Wizard** to get the first screen as shown below.

**IPPBX Wizard**

**Extension & Groups Setup : Index 1**

Extension Group Name:	<input type="text" value="VigorPhone"/>	(for example : sales)
Extension Group Number:	<input type="text" value="910"/>	(for example : 100)
Start Number of the extension Group:	<input type="text" value="911"/>	(for example : 101)
Number of extensions in this group:	<input type="text" value="10"/>	(for example : 10, max = 20)
<input type="button" value="OK"/>		

Index	Group Name	Group Extension	Hunt List(Max 20 Extension)
1.	VigorPhone	910	911-920
2.			
3.			
4.			
5.			
6.			
7.			

Type the extension group name, group number, start number, and number of extension fields. Click **OK** to save them. The new added group will be displayed on the screen. Then click **Next** to access into next web page.

- In the SIP Trunk Setup page, you can set profiles for six SIP outside lines at one time.

**IPPBX Wizard**

**Sip Trunk Setup : Index 1**

Profile Name:	<input type="text"/>	(11 characters max.)
Domain/Realm:	<input type="text"/>	(63 characters max.)
Proxy:	<input type="text"/>	(63 characters max.)
Account Number/Name:	<input type="text"/>	(63 characters max.)
Password:	<input type="text"/>	(63 characters max.)
Trunk number:	<input type="text" value="001"/>	(3 characters max.)
<input type="button" value="OK"/>		

Index	Profile Name	Domain/Realm	Proxy	Account Number/Name	Trunk Number
1.					001
2.					002
3.					003
4.					004
5.					005
6.					006

Type the profile name, domain/realm, proxy, account number/name, password and trunk number fields, then click **OK** to save them. The new added profile will be displayed on the screen.

Index	Profile Name	Domain/Realm	Proxy	Account Number/Name	Trunk Number
1.	SalesMarket	192.168.1.55	nat.draytel.org:5065	salesgroup	001
2.					002
3.					003
4.					004
5.					005
6.					006

4. Click **Next** to access into office hours setup page.

### IPPBX Wizard

#### Office Hours Setup

Now, You can make the work time schedule of your office.

	Hour :	Min
When do you start working in the morning	00 ▾	00 ▾
When do you have a rest at noon	00 ▾	00 ▾
When do you start working in the afternoon	00 ▾	00 ▾
When do you leave the office	00 ▾	00 ▾
Is this schedule available at weekend?	<input type="radio"/> Yes <input checked="" type="radio"/> No	

Please specify office hours including starting point and ending point on duty day(s). Then, click **Finish** to save the settings and exit the wizard.

work time schedule of your office.

	Hour :	Min
ing in the morning	08 ▾	00 ▾
st at noon	12 ▾	00 ▾
ing in the afternoon	13 ▾	00 ▾
office	17 ▾	30 ▾
e at weekend?	<input type="radio"/> Yes <input checked="" type="radio"/> No	

5. Then connect VigorPhone to the network. Each user of VigorPhone can get the extension number/password respectively.

6. The log-in request will be displayed on the screen of the phone. Please input the extension number. Press OK.

Ext Number		13:12:05	
911 ■		123	
Delete	Clear	OK	Exit

7. Next, input the password. Press OK.

Ext Password		13:12:05	
*** ■		123	
Delete	Clear	OK	Exit

8. VigorPhone can automatically configure itself with settings coming from VigorIPPBX. Successful message will be shown as below. Now, all the configurations have been done.

13:12:06			
Auto Configuration			
Ext 911 Success			
Icom	Missed	DND	P.Book

9. Now, the extension number has been registered by VigorPhone successfully. (See the number on the right side of the arrow.)

Thursday		13:12:08	
Oct		▶ 911	
15		_____	
Icom	Missed	DND	P.Book