



# How to use the function of Labeling on Caller ID in Hunt Group

Labeling on Caller ID allow us to set different number display such as Caller Number, Hunt Group Name or Group Number for the incoming call when the caller dials the hunt group extension number remotely.

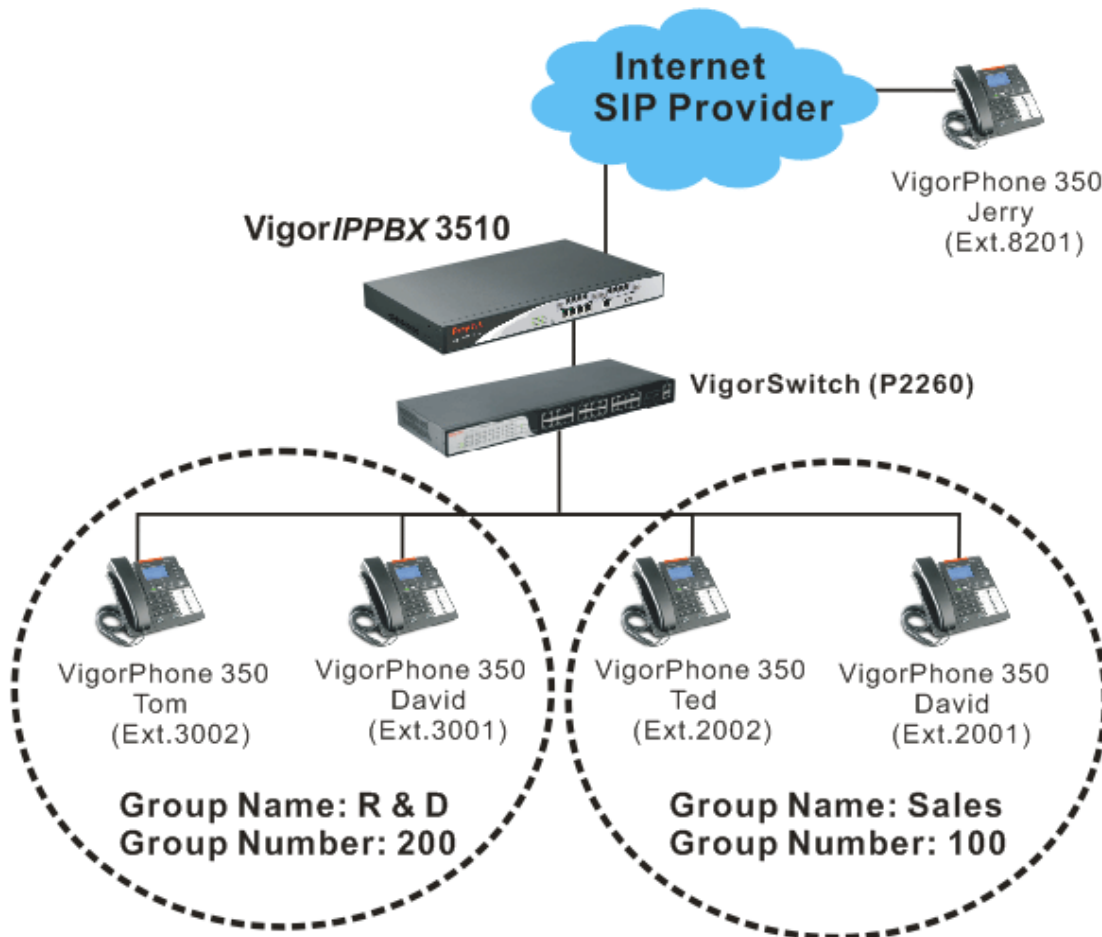

Above shows a simple example. Based on the figure, we can configure the web page as the following:

1. Open **IP PBX>>PBX System** and click the link of **Hunt Group**.

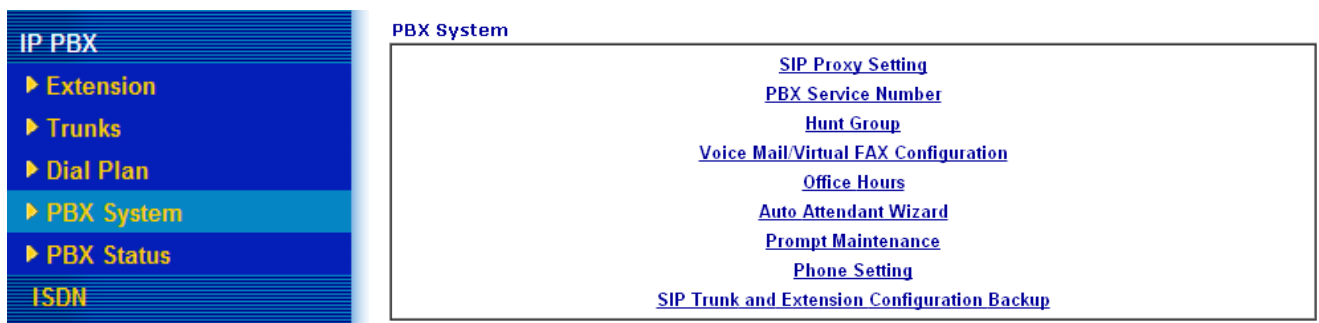

2. Click any index number (e.g., #1 in this case) to open the following page:

**IP PBX >> PBX System**

**Hunt Groups Index 1**

Hunt Group Name	<input type="text" value="Sales"/>
Hunt Group Extension	<input type="text" value="100"/>
Labeling on caller ID	<input type="text" value="Display Group Extension"/> ▾
Hunt Rule	<input type="text" value="Simultaneously"/> ▾
Timeout	<input type="text" value="60"/> Seconds (MUST greater than 10 seconds)
Overflow Rule	<input type="text" value="Terminate"/> ▾
<input type="checkbox"/> Play user prompt <input type="text" value="1"/> ▾ if all group members are busy/off-line.	
<p><b>Hunt List (Maximum Of Group Member:20)</b></p>	

3. Type **Sales** as the **Hunt Group Name** and set 100 as the number of the **Hunt Group Extension**.

4. Next, configure **Labeling on Caller ID**. There are three options you can choose.

Labeling on caller ID

Hunt Rule

Timeout

▾  
 Disable  
Display Group Name  
 Display Group Extension

<b>Disable</b>	When Jerry dials 100 (Group Number of Sales) through SIP Trunk, the calling number display of all of the extensions inside the Hunt Group will display <b>8201</b> .
<b>Display Group Name</b>	When Jerry dials 100 (Group Number of Sales) through SIP Trunk, the calling number display of all of the extensions inside the Hunt Group will display <b>Sales</b> .
<b>Display Group Extension</b>	When Jerry dials 100 (Group Number of Sales) through SIP Trunk, the calling number display of all of the extensions inside the Hunt Group will display <b>100</b> .

5. After choosing the one you want, click **OK** to save the settings and exit the web page.

6. Now, the system will apply such function according to your selection to the incoming calls.